



Schraubanschluss / Screw connection

Montagehinweis / Mounting information / Référence de montage / Indicaciones de montaje /
 Infomazioni per il montaggio

1



1a	Gerade / Straight	1a	Gewinkelt / Angled
			

2




9025750000 (0,34 mm²) 9011460000 - PZ 6/5

Aderquerschnitte /	
Connection cross-section:	0.14 ... 0.75mm²
Empfohlen / Recommended:	0.34 mm²

2a



3

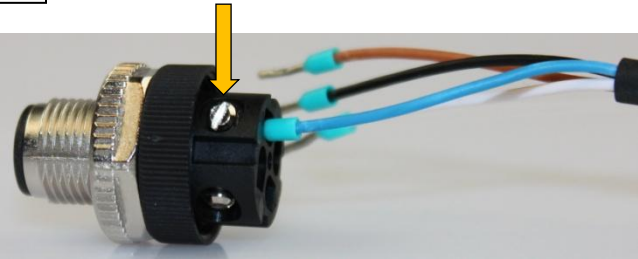



9008370000 - SDIS 0.4X2.5X75

Anzugsdrehmoment Schraubverbindung	
Tightening torque of the screw connection	
M2,5	0,4 Nm

4



4a

4b

4a	Anzugsdrehmoment Kopf - Gehäuse	
	Tightening torque head - housing	
	Kunststoffgehäuse / plastic housing	0,8 Nm
	Metallgehäuse / metal housing	0,6 - 0,8 Nm
4b	Anzugsdrehmoment Kabelverschraubung	
	Tightening torque cable gland	
	4 – 5 mm Kabel / cable Ø	0,8 - 1 Nm
	5 – 6 mm Kabel / cable Ø	0,8 - 1 Nm
	6 – 7 mm Kabel / cable Ø	0,8 - 1 Nm
	7 – 8 mm Kabel / cable Ø	0,8 - 1 Nm
	8 – 12 mm Kabel / cable Ø	1 - 1,4 Nm